



## DP-75 4B




1/2" Diam Bolts @ 4-1/2" OC  
Bolt height 1"




Plinth size - 5-5/8" Sq  
Rotation -19 degrees CCW

## DP-100E 4B Square Top




5/8" Diam Bolts @ 4" OC - N/S, E/W  
Bolt height 2-3/8"

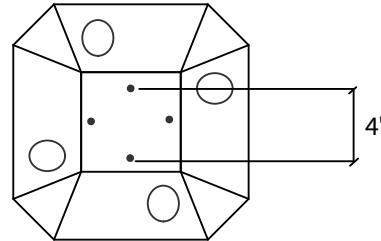


Plinth size - 5-3/8" Sq  
Rotation - Orthogonal (square to pier)

## DP-100E 4B Twist Top




5/8" Diam Bolts @ 5-1/4" OC  
Bolt height 1" - Optional 2-1/4" Bolt height

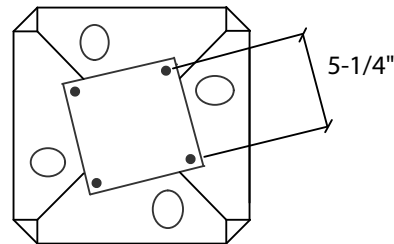


Plinth size - 6-1/4" Sq  
Rotation -19 degrees CCW

## DP-200E 4B

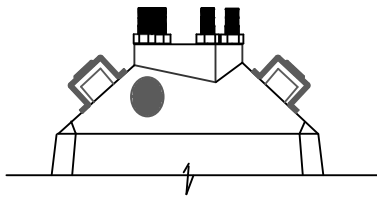

3/4" Diam Bolts @ 7-1/2" OC  
Bolt height 3-1/8"

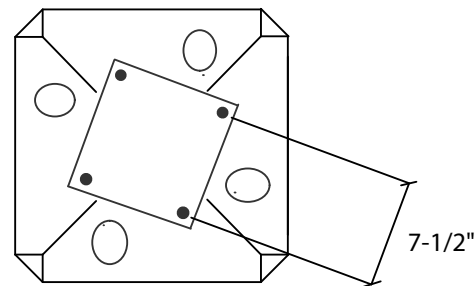

Plinth size - 9" Sq  
Rotation -19 degrees CW

US PAT. #5039256, #6910832, & #7326003

**COPYRIGHT:** © 2017  
ALL DETAILS IN WHOLE, OR IN PART,  
OR ANY PORTION THEREOF ARE COPYRIGHTED  
BY PIN FOUNDATIONS, INC. AND MAY BE USED  
BY THE RECIPIENT OR THEIR ASSIGNS FOR  
PROJECT APPLICATIONS ONLY.

DOC0027/01.2017

**PIN FOUNDATIONS, INC.**

GIG HARBOR, WASHINGTON  
(253) 858-8809